NASA TM-2003-104805



Evaluation of Neutral Body Posture on Shuttle Mission STS-57 (SPACEHAB-1)

Frances E. Mount NSBRI Houston, Texas

Mihriban Whitmore Lyndon B. Johnson Space Center Houston, Texas

Sheryl L. Stealey Johnson Engineering Houston, Texas

THE NASA STI PROGRAM OFFICE . . . IN PROFILE

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the lead center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- TECHNICAL PUBLICATION. Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- TECHNICAL MEMORANDUM. Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- CONTRACTOR REPORT. Scientific and technical findings by NASA-sponsored contractors and grantees.

- CONFERENCE PUBLICATION. Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- SPECIAL PUBLICATION. Scientific, technical, or historical information from NASA programs, projects, and mission, often concerned with subjects having substantial public interest.
- TECHNICAL TRANSLATION. Englishlanguage translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at http://www.sti.nasa.gov
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
 NASA Access Help Desk
 NASA Center for AeroSpace Information
 7121 Standard
 Hanover, MD 21076-1320

NASA TM-2003-104805



Evaluation of Neutral Body Posture on Shuttle Mission STS-57 (SPACEHAB-1)

Frances E. Mount NSBRI Houston, Texas

Mihriban Whitmore Lyndon B. Johnson Space Center Houston, Texas

Sheryl L. Stealey Johnson Engineering Houston, Texas

National Aeronautics and Space Administration

Lyndon B. Johnson Space Center Houston, Texas

	• •	1 1 1		C		
Δ	vail	ah	10	tro	m	٠
$\overline{}$	van	(11)	1.		,,,,	_

NASA Center for AeroSpace Information 7121 Standard Hanover, MD 21076-1320 National Technical Information Service 5285 Port Royal Road Springfield, VA 22161

This report is also available in electronic form at http://techreports.larc.nasa.gov/cgi-bin/NTR

Contents

	Page
Introduction	1
Method	2
Subjects	2
Apparatus and Materials	3
Experiment Data	4
Procedure	4
Results And Discussion	5
Conclusions/Recommendations	7
References	8
Appendix 1: Crew Anthropometric Measurements	9
Appendix 2: Selected Mission Photographs	10
Tables 1 Crew NBP Measurements	7
Figures	
1 MSIS neutral body posture	1
2 Experiment set up at the middeck	
3 NBP of the STS-57 crew members	5

Acronyms and Abbreviations

ESA European Space Agency

JSC Johnson Space Center

mm millimeter

MSIS Man-Systems Integration Standards

NBP neutral body posture

STS Space Transportation System

Introduction


Past research from the Mercury, Gemini, Apollo, and Skylab Programs (and, more recently, from the Shuttle missions) has shown that the space environment induces physiological changes in the human body. Among these changes are fluid shifts in the upper body and chest cavity, spinal lengthening, and muscular atrophy. Additional changes include space motion sickness, cardiopulmonary deconditioning, and bone mass loss, as well as some changes in visual perception. These require a period of adaptation and can substantially affect both crew member performance and posture throughout a mission. These physiological effects have been of particular interest for posture studies and, when work activities are conducted, have been known to impact the body's center of gravity, reach, flexibility, and dexterity. Additional posture considerations include attention to the range of crew member body size and the possibility that a crew member's posture may change over mission duration. All these aspects of posture must be considered to safely and efficiently design space systems and hardware.


In an effort to develop an overall posture on the subject of space-induced physiological changes in the human body, NASA has documented its microgravity body posture in the Man-Systems Integration Standards (MSIS) (Fig. 1). The MSIS posture is generally used by the space community in the design of workstations and tools for space application.

However, European Space Agency (ESA) personnel have suggested that NASA's microgravity body posture be further investigated for a number of reasons. These are:

- Small sample size: NASA's original determination was based on a small sample of Skylab crew members and in-flight photographs.
- Possible imprecision: The reference points used to measure the joint angles were not very precise because they were obscured by clothing.
- Lack of detail: Limited literature from the Skylab missions only superficially described experiments conducted on Skylab.

After investigating photographs and video taken during the Skylab mission, ESA personnel reported that only 36% of the data reviewed matched the NASA microgravity body posture that is graphically portrayed in the MSIS. Because of the questions raised, further investigation was deemed necessary.

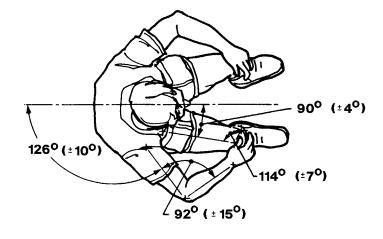

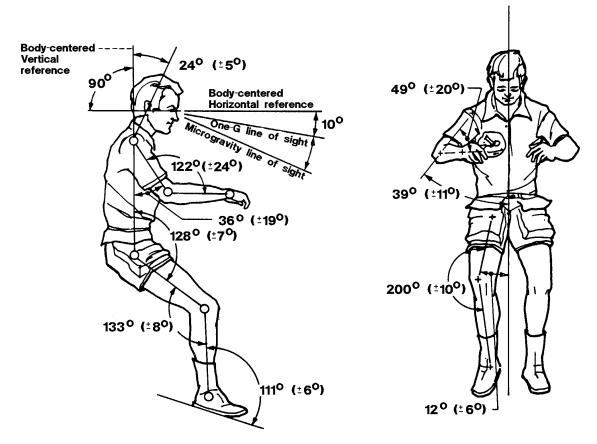

Note: The segment angles shown are means. Values in parentheses are standard deviations about the mean. The data was developed in Skylab studies and is based on the measurement of 12 subjects.

Figure 1. MSIS neutral body posture

This study was undertaken by the Human Factors and Ergonomics Laboratory at the Johnson Space Center (JSC) to investigate human body posture exhibited under microgravity conditions. STS-57 crew members were instructed to assume a relaxed posture that was not oriented to any work area or task. Crew members also were asked to

don shorts and tank tops and to be blindfolded while data were recorded. This was done to facilitate the acquisition of non-orientation posture as well as to ease the visibility of body segments and limb angles. This effort from the STS-57 (SPACEHAB-1) mission was a means of acquiring video data with minimal hardware requirements and as nonintrusively as possible. Due to mission constraints, video data were only acquired once during the mission from each of the six crew members. This study was a first attempt at gathering specifically selected video data and working out methods and procedures for acquiring more quantitative data from future missions.

For the STS-57 mission, several crew familiarization briefings, as well as training sessions in the full fuselage trainer, were conducted at JSC. Data were acquired from several crew mission debriefings. A detailed discussion of these data and findings are reported below.

Method

Video and still photography were the primary means of acquiring data on microgravity posture for this mission. This option was chosen to expedite data acquisition and to accommodate stowage, weight, and time limitations on the STS-57 mission. Past data acquisition had focused on video as a means of assessing posture. To provide additional relational data with which to develop a posture database, video was also selected for this study. Camera placement location was carefully chosen within the constraints of the middeck volume. The camera locations approximated 90° placement as closely as possible. Only 30° placement was possible because of the middeck's rectangular shape and narrowness (Fig. 2). The two video cameras and the one still camera for this study were oriented in the same focal plane to provide similar perspectives from the two data types.

Previous video data from Skylab were taken from a handheld still camera and were analyzed by hand. In the current study, we sought to investigate the use of a more automated and objective method. Thus, special software developed by NASA was used to select individual video frames that coincided with the still shots. This software was used to define an individual's posture from the limb and joint angles identified from the data.

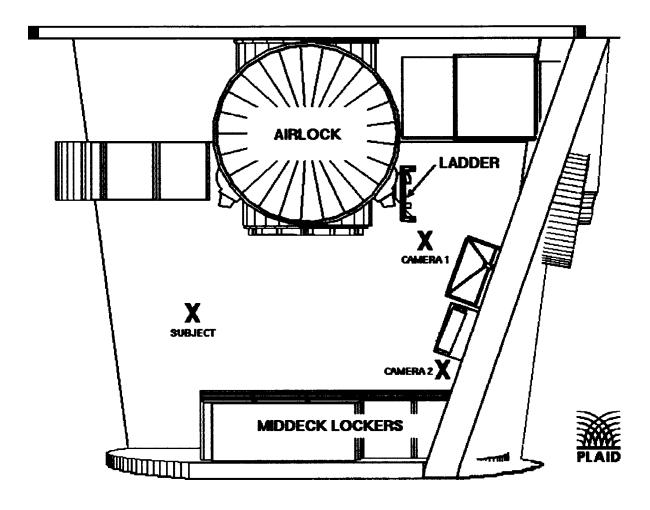


Figure 2. Experiment set up at the middeck showing approximate location of the two video cameras

Subjects

General anthropometric body measurements were taken of all six STS-57 crew members prior to flight. In all, 26 different anthropometric measurements were taken in the Anthropometric and Biomechanics Laboratory at JSC. Representative measurements included weight, stature, arm reach, thumb tip reach, shoulder height, and knee height (Appendix 1). The crew represented 5th to 90th percentile in anthropometric stature. There were one female at the 5th and one female at the 75th percentiles; one male at the 50th and one male at the 90th percentiles; and two males at the 75th percentile. All six crew members participated in on-orbit testing. The diverse range of anthropometric body types on the STS-57 mission provided an extraordinary opportunity for gathering the data necessary to begin assessing posture and for defining the effects of microgravity on posture.

Apparatus and Materials

Two Canon Mark II video cameras were used to record the video data. These video cameras used wide-angle lenses (0.7) to accommodate the small space of the middeck. Available middeck lighting was used. A Nikon F4 with a wide-angle lens (0.7) and a flash was used to take still shots. The Canon and Nikon cameras were mounted to their positions using standard Shuttle bogan mounts with clamps. The film used in the Nikon was CNEG ASA 100, 12 exposure rolls. The cameras, camera-mounting equipment, flash, lenses, videotape, sleep masks, shorts, and film were all government-furnished equipment that required no additional flight certification or review. The tank tops used by the crew were specially furnished and approved for flight.

Experiment Data

NBP video data were provided to the experimenter on two separate 8-mm tapes; one from each video camera used in the study. These data were also provided to JSC, where they were archived with the other mission video and downlink. Video data from the two NBP tapes were then synchronized and transferred onto one videotape in VHS format. One of the synchronized tapes allowed the researchers to view the various body angles together for easier and more consistent analysis. Specific portions of the video were selected based on consistency of body posture and position. These images were used to construct still video frames for further analyses. We obtained body positions and joint angles using specialized anthropometric software and compiled them into data tables for each crew member. These data tables were directly employed in constructing wire-frame representations of the various crew postures for comparison with the MSIS NBP.

Procedure

The crew were positioned in *Endeavour*'s middeck in front of the sleep stations (over the trash stowage compartment located on the floor of the middeck, toward the aft bulkhead). Two video cameras were located on the opposite (starboard bulkhead) wall. The still camera was mounted to the ML98D panel located on the starboard bulkhead of the middeck. This camera was purposely placed at the midpoint between the two video cameras and in the same focal plane to provide synonymous data. One video camera was mounted to the experiment handrail on middeck locker face MF14E; the other video camera was mounted to the middeck ladder that provided access to the aft flight deck. The video cameras were mounted to their respective locations using bogan arms and clamps. Videotape and 35 mm still shots (photographs) of the crew were taken once, late in the mission on flight day six. The video cameras were set up and the videotape was run continuously to acquire all six crew members' postures at relatively the same time. A

flash was used with the 35 mm camera to synchronize video and still shots for easier data analysis. Video camera tapes were recorded in the Hi8 setting. Crew postures were recorded as crew members were rotated 360° in 45° increments. Crew members were dressed in tank tops and shorts to facilitate viewing the body joints and limb angles. A sleep mask was used by the subjects to encourage relaxation and non-orientation to any workstation or task area.

Still shots were taken of the video camera setup and position to record the exact location of the cameras during data acquisition. Crew members generally arrived in the middeck in shorts and T-shirts. They then donned the sleep mask and assumed a neutral posture. The attendant crew member rotated the crew participant to the appropriate orientation for the data to be taken. Crew participants were rotated 360° in 45° increments to provide video and still shots from as many angles as possible. At least two still shots of each position were obtained in each of the incremented positions. The flash from the still camera was used to synchronize the video. These were combined with still video shots to form 3-dimensional wire-frame views of the crew's NBP.

Results and Discussion

Data analyses were conducted using software specially developed by NASA to determine the joint angles and limb positions of each crew member. Video frames from camcorder data were specifically selected and matched with still photos to derive 3-dimensional wire-frame representations of crew postures. These postures were compared to the MSIS NBP posture to determine the apparent range of differences in posture, if any.

Analyses of mission data indicated that several different crew postures were exhibited during data acquisition on flight day six. Appendix 2 contains eight selected mission photographs that provide representative data on which analyses were conducted. Data acquisition on day six allowed the crew to become fully adapted to the microgravity environment and provided time to recover from any ill effects that space motion sickness may have induced. Figure 3 shows the posture of each crew member from front and side views, respectively. No single crew member exhibited the typical NBP called out in the MSIS, Figure 1.

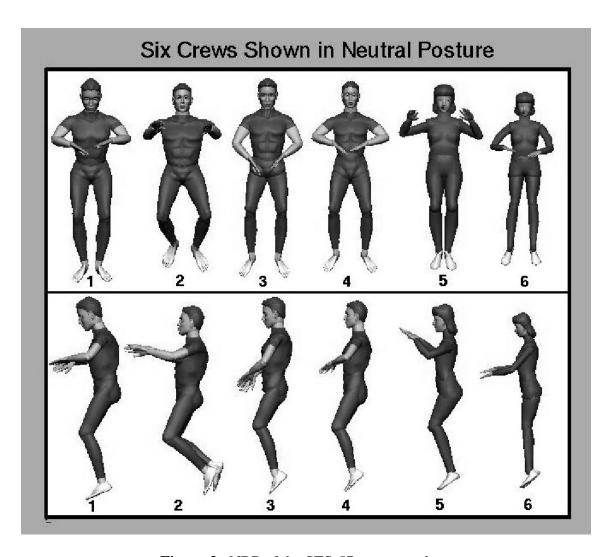


Figure 3. NBP of the STS-57 crew members

Generally, the arm and shoulder positions exhibited by crew members were less bent and leg positions were straighter at the hip and knee than the MSIS neutral posture. STS-57 crew posture data also showed the arms closer to the torso sides and generally held lower toward the waist. The MSIS neutral posture figure indicated arm positions closer to the mid chest area with the elbows away from the body (Fig. 1).

Specifically, three male and two female crew members exhibited NBPs that were more elongated or less bent at the hips and knees than the MSIS NBP. The lower arm and hand positions showed a range from shoulder height to waist height. The separation between hands ranged from a shoulder width apart to nearly touching in front of the crew member.

Three crew members—two females and one male (Fig. 3; crew 2, 5, and 6)—exhibited extreme aspects in posture. The male showed a posture that was very different from that

of the other five crew members (Fig. 3; crew 2). His posture showed a stance that was shifted forward with the knees pointed down and the legs at almost a 45° angle to the floor. His arms were also more elongated at the shoulder and elbow, in a forward position with the fingers curled at the knuckles. One female had deviations in her posture focusing on the leg and foot regions (Fig. 3; crew 5). Her posture data showed the legs very close together, nearly touching along the inner thigh, at the ankle, and at the inner foot arches. The second female's posture was almost erect, with only slight bending around the knees and at the neck (Fig. 3; crew 6). Her legs were closer to the MSIS neutral posture than were the other female's. However, her posture data showed that her arms were lower and closer to the body and waist than to her mid chest region, as compared to the MSIS neutral posture. Another area of variation was neck positions. This variation was found with two crew members (Fig. 3; crew 4 and 5). These two crew members exhibited relatively straight necks in combination with the elongated posture discussed previously. The other four crew members exhibited bent necks similar to the MSIS neutral posture. One additional deviation was found with a male crew member who exhibited a forward pitch to his back in combination with the bend in the neck area (Fig. 3; crew 1).

Because of these deviations from the standard MSIS NBP as discussed here, one composite posture may not be adequate. These findings suggest that construction of several composite postures or a range of postures may be more constructive for design purposes. Table 1 shows the joint angles in degrees for individual crew members.

In general, three main postures were exhibited by the crew as a whole. These constituted (1) an almost standing posture (Fig. 3; crew 6), (2) a slightly pitched forward posture with an extreme bend at the knees (Fig. 3; crew 2), and (3) an elongated posture with a straight neck (Fig. 3; crew 4 and 5). Differences in posture exhibited in this study could be a result of the athletic bearing of the participants or the type of exercise, or both, and the amount of exercise regularly performed. Other differences may also stem from past physical injuries such as bone breaks and knee or shoulder injuries, and from gender differences such as center of gravity.

ESA has reported in presentations that discrepancies found in posture could be owing to cultural differences and physical injuries affecting joint rotation and flexibility. Another factor cited by ESA was the deviations brought about by the participants not being blindfolded, which oriented them to a work area and predisposed their posture orientation. Additional factors affecting posture may include physical typing based on skeletal build and the fat-to-muscle ratio of the participants. This would tend to be highly related to additional anthropometric considerations, such as percentile characterizations for specific body segments and joint motion and flexibility differences that could also affect stance and posture.

 Table 1. Crew NBP Measurements

Anthropometric Measurement	MSIS NBP	Crew 1	Crew 2	Crew 3	Crew 4	Crew 5	Crew 6
Joint Angles	Left-Right	Left-Right	Left-Right	Left-Right	Left-Right	Left-Right	Left-Right
Hip flexion	50	33	33 - 29	33	33	29	12
Hip abduction	18.5	6.5 - 5.5	20 - 16	13 - 17.5	15.5 - 16	3.5 - 4.5	4 - 9
Knee flexion	50	50	83 - 87	50	50	44	11 - 12
Ankle plantar extension	21	6 - 7	15 - 14.5	29 - 30	27 - 24	16 - 14	35 - 41
Waist flexion	0	13	0	1	0	0	2
Neck flexion	24	16	18	16	5	7	16
Left neck lateral bend	0	0	0	3	0	0	0
Shoulder flexion	36	49 - 46	67 - 64	29	33 - 35	60 - 57	36
Shoulder abduction	50	32 - 33	26 - 26.5	27 - 29	40.5	24 - 45	23 - 36
Medial shoulder rotation	86.6	58 - 61	45.5 - 41	71 - 77	74.5 - 74	25.5 - 26.5	50 - 48
Elbow flexion	90	78	45 - 53	61 - 57	94 - 91	78 - 80	51 - 64
Wrist extension	0	0	3 - 0	0	0	0	0
Wrist ulnar bend	0	0	0	0	0 - 9	0 - 3	0
Forearm pronation	N/A	N/A	26	20 - N/A	N/A - 2	16 - N/A	N/A - 5
Forearm supination	30	7 - 10	N/A	N/A - 30	15 - N/A	N/A - 4	14 - N/A
Finger flexion	0	42	60	30	21 - 57	55 - 47	25 - 35

Measurements are in degrees.

This type of data was not available from STS-57 crew members, but should be acquired in future studies.

Conclusions/Recommendations

Previous Skylab data were generated from three male participants. Thus, the addition of female participants in the database provides a basis for greater variety in representative postures that should be considered when designing microgravity equipment and tools. Even with the limited amount of data and sampling from one day during the mission, data indicated that a single posture was not all-encompassing. The data also indicated that several postures were evidenced in microgravity, thereby providing a range of postures that may be more representative than the single, all-encompassing posture documented in the MSIS. This suggests that the MSIS was generalized significantly and should be updated with additional data points to provide more representative crew postures. This would also indicate that ESA's concerns about the original determination were correct and that further study should be made of microgravity posture as manifested by a more normally distributed participant population.

To achieve this, as data are acquired on males and females, a database of crew postures should be established to record and update NBP posture. Both international and American subjects should be included in the database, since future space activities will involve crew members from all nations for cooperative endeavors such as the Space Station, *Mir*, and joint international crew flights launched on both the Shuttle and Energia. This database should provide information on crew working postures so that analogous data can be readily applied to workplace and tool design for a wide variety of microgravity environments.

Specifically, in addition to gathering data for defining the zero-g posture, future evaluations should define precise posture requirements for workstation, glove box, and maintenance activities. In addition, the design of foot restraints and handholds should be considered from a posture standpoint to optimally design work tasks and to reduce crew workload, improve hardware operability, and enhance crew performance.

References

- Gunderson, Robert T.; and Bond, Robert L. (1976). Zero-g work station design. JSC IN 76-EW-1. JSC Internal document. Available to JSC users only.
- Jackson, John; Bond, Robert; and Gunderson, Robert (1975). Neutral body posture in zero g. JSC-09551. JSC Internal document. Available to JSC users only.
- Kroemer, K. H. E.; Kroemer, H. J.; and Kroemer-Elbert, K. E. (1990). *Engineering physiology bases of human factors/ergonomics, 2nd. ed.* New York, NY: Van Nostrand Reinhold.

- NASA. (1991). Space Station Freedom Man Systems Integration Standards (MSIS). June 1991, Houston, TX: NASA. (NASA-STD-3000, Vol. IV) (also available at msis.jsc.nasa.gov).
- NASA. (1975). Man-machine engineering data applications of Skylab experiments M478 and M516. Bulletin no 17: Neutral Body Posture in 0-g. Technical Report JSC-09551. JSC Internal document. Available to JSC users only.
- NASA. (1978). Anthropometric source book Volume I: Anthropometry for designers. (NASA Reference Publication 1024.) Houston, TX.
- Whittle, Michael W.; Tobin Herron; and Cuzzi, Jamie (1977). Biostereometric analysis of body form, *Biomedical Results From Skylab*, NASA SP-377, pp. 198-202.

Appendix 1:

Crew Anthropometric Measurements

	Crew 1	Crew 2	Crew 3	Crew 4	Crew 5	Crew 6
Gender	Male	Male	Male	Male	Female	Female
1) Weight	78.0	82.1	72.1	64.0	64.0	45.8
2) Stature	183.9	183.6	178.3	174.7	166.5	151.6
3) Arm reach from wall	87.8	87.3	87.6	85.3	76.5	85.0
4) Thumb tip reach	82.2	81.5	82.3	75.8	70.9	76.9
5) Acromial (shoulder) height	149.6	150.9	147.5	142.6	135.6	122.6
6) Elbow height	116.0	117.4	114.3	109.5	104.6	92.7
7) Waist height	108.4	109.8	106.2	103.5	98.2	89.7
8) Wrist height (standing)	93.2	93.1	89.1	87.0	85.0	71.6
9) Crotch height	87.6	86.4	83.8	84.2	79.4	73.2
10) Ankle height (standing)	11.3	10.5	10.4	9.5	10.5	9.8
11) Sitting height	96.5	94.9	91.6	91.0	87.6	78.6
12) Sitting eye height	86.4	83.5	81.7	81.9	77.1	70.8
13) Knee height	57.2	57.6	56.3	52.7	53.0	46.6
14) Popliteal height	46.1	45.0	44.1	42.5	39.8	37.8
15) Buttock-knee length	63.3	64.6	63.0	61.3	58.3	53.5
16) Buttock popliteal length	50.4	51.7	52.0	50.9	48.2	43.3
17) Shoulder-elbow length	37.1	37.1	36.8	36.4	33.6	32.4
18) Forearm-hand length	48.8	49.0	49.9	46.6	43.4	42.4
19) Hand length	18.4	19.0	18.6	18.5	17.5	17.1
20) Foot length	26.9	28.3	25.8	25.7	23.6	22.6
21) Hand breadth	8.8	8.3	8.3	8.4	7.4	7.5
22) Foot breadth	9.4	11.1	9.5	9.4	8.8	8.5
23) Bideltoid breadth	45.8	47.8	47.2	45.8	40.6	38.5
24) Biacromial breadth	42.6	43.2	42.7	41.9	36.2	35.4
25) Hip breadth	35.5	35.9	34.4	33.2	332.6	30.3
26) Wrist circumference	17.0	17.0	16.0	16.2	13.2	15.8

All measurements are in centimeters, except weight, which is in kilograms.

Appendix 2:

Selected Mission Photographs

















REPOR		Form Approved OMB No. 0704-0188				
Public reporting burden for this collection of informaintaining the data needed, and completing and suggestions for reducing this burden, to Washingto and to the Office of Management and Budget, Pape	reviewing the collection of information. Send on Headquarters Services, Directorate for Infor	omments regarding this burden estin mation Operations and Reports, 1215	nate or any other	aspect of this co	llection of information, including	
AGENCY USE ONLY (Leave Blank	ATES COVE orandum	ES COVERED ndum				
4. TITLE AND SUBTITLE Evaluation of Neutral Body Postur	re on Shuttle Mission STS-57 (S	БРАСЕНАВ-1)	5. FUI	5. FUNDING NUMBERS		
6. AUTHOR(S) Frances E. Mount*, Mihriban Whi	tmore, Sheryl L. Stealey					
7. PERFORMING ORGANIZATION N Lyndon B. Johnson Space Center	AME(S) AND ADDRESS(ES)			8. PERFORMING ORGANIZATION REPORT NUMBERS S-783		
Houston, Texas 77058						
9. SPONSORING/MONITORING AGE National Aeronautics and Space A		5)	A		G/MONITORING ORT NUMBER	
Washington, DC 20546-0001	allillist attor		1111-2	003-107802	FICVA	
11. SUPPLEMENTARY NOTES *NSBRI						
Rev. A. is a re-issue of the electron	nic copy only with all illustration	ns incorporated.				
12a. DISTRIBUTION/AVAILABILITY S			12b. [ISTRIBUTIO	N CODE	
Available from the NASA Center : 7121 Standard	for AeroSpace Information (CA	SI)				
Hanover, MD 21076-1320	subject category: 52					
13. ABSTRACT (Maximum 200 words Research has shown that the space body and chest cavity, spinal lengt loss, as well as some changes in viperformance and posture. These pleater of gravity, reach, flexibility systems and hardware. NASA has space community uses the MSIS period posture should be further investigated lack of detail. JSC undertook this semembers were instructed to assums shorts and tank tops and to be blint the six crew members. No one creward range of postures may be more of workstation, glove box, maintenant 14. SUBJECT TERMS posture, human body, microgravity human factors engineering	environment induces physiology, thening, muscular atrophy, space sual perception. These require a hysiological effects, when work, and dexterity. All these aspect documented its microgravity be osture to design workstations at atted for several reasons, including study to investigate human body e a relaxed posture that was not dfolded while data were recorded with member exhibited the typical constructive for design purposes are, foot-restraint, and handhold	e motion sickness, cardio a period of adaptation and activities are conducted, so of posture must be consudy posture in the Man-Sand tools for space applicating small sample size in proposture exhibited under oriented to any work are ed. Video data were acquisited NBP called out in the Man-Sand tools. Future evaluations show activities.	pulmonary d can substa have been sidered to sa ystems Inte- tion. Howe revious stud- microgravi ea or task. C ired once d SIS; one co	decondition antially affect known to in afely and effect gration Stan ver, the mic dies, possible ty condition frew member are member uring the memposite post recise posture.	ning, and bone mass ct both crew member in pact the body's ficiently design space idards (MSIS); the erogravity body is imprecision, and ins. STS-57 crew ers were asked to don ission from each of sture is not adequate. The requirements for	
17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	I 19. SECURITY CLASS OF ABSTRACT	IFICATION	20. LIMITA	TION OF ABSTRACT	
Unclassified Unclassified Unclassified			1	Unlimited		

Unclassified

_			